

LED AREA FLOOD LIGHTING

WATERPROOF LIGHTING

PROTEK

The Protek from Lighting Technology International provides a durable and high quality yet compact and light weight solution for waterproof flood lighting. With adaptability at the core of the design, the Protek is able to suit a wide range of applications from industrial to specialty street lighting.



LIGHTING
TECHNOLOGY

PROTEK



HIGH EFFICIENCY

The Protek utilises the latest technology of the semiconductors Osram Duris E5, to ensure higher efficiency.

ADAPTABLE

This floodlight has the flexibility to adapt itself to any surface application, due to the homogeneity of light distribution.

OPTIMUM PASSAGE OF LIGHT

Designed with corrosion, weathering and rough handling in mind the Protek undergoes a variety of stress tests to ensure it meets all are requirements needsand more.

EXCELLENT DURABILITY

The light weight structure of the Protek means ease of installation and replacement.

VERSITILE

With an array of options to suit different scenarios, the protek is versitile enough to be the perfect solution for a wide gamut of applications.


PROTEK

APPLICATIONS

Thanks to the Protek's unrivaled performance and longevity, along with the range of options available, it can be utilised in a range of vastly different settings.




STREET LIGHTING



ARCHITECTURE



OUTDOOR LIGHTING

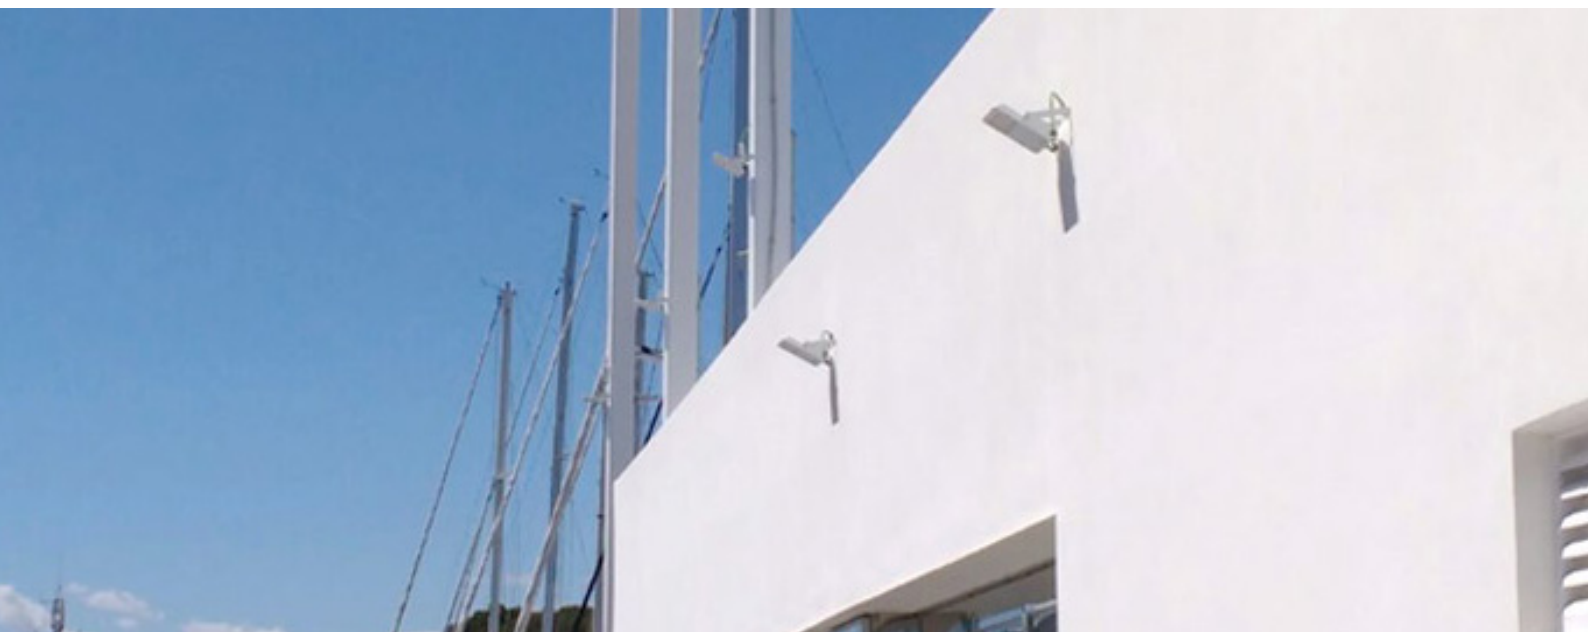

LED AREA FLOOD LIGHTING

PROTEK



Includes protection polymer, driver and Leds lamps

| Ref. | Colour | Lamp. | Lumens | W |
|---------------|--------|-------|--------|-----|
| 4125 01 08 85 | White | LED | 1055 | 8w |
| 4125 01 16 85 | White | LED | 2110 | 16w |
| 4125 01 25 85 | White | LED | 3162 | 25w |
| 4125 01 50 85 | White | LED | 6332 | 50w |

* Standardly supplied with 5700° K lamp.

OPTIONS

| | |
|------------------|---------------------------------------------------------------|
| Ref. DRF | Dimmable driver edge phase |
| Ref. DR | Dimmable driver 1 - 10v |
| Ref. DRD | Driver regulable Dali / Dimmable driver Dali |
| Ref. 4160 | Driver para funcionam. a 12Vdc. / Driver for 12 Vdc operation |
| Ref. 4160 | Driver for 24 Vdc operation |
| Ref. 4131 | Opal diffuser |
| Ref. AM | Special marine environment paint |
| Ref. DM8 | Motion detector Integrated |

LED OPTIONS

| | | Ref. 83 | Ref. 84 | Ref. 85 |
|-----------------------|-----|---------|---------|---------|
| Colour temperature | W | 3000°K | 4000°K | 5700°K |
| Lumens Osram Duris E5 | 8w | 969 | 1055 | 1055 |
| | 16w | 1939 | 2110 | 2110 |
| | 25w | 2909 | 3162 | 3162 |
| | 50w | 5818 | 6332 | 6332 |

LED AREA FLOOD LIGHTING

PROTEK



**LIGHTING
TECHNOLOGY**

Unit 18/41-49 Norcal Rd,
Nunawading, Vic Australia

tel : +61 39872 7600
e-mail : sales@lightingtechnology.com.au